
B2 Series 8" Shallow Base

Applications

The shallow base is designed to mount an 8″ inset light into a taxiway or runway pavement location.




Compliance with standards

- FAA: AC 150/5345-46
- FAA: AC 150/5345-42
- IEC TS 61827

Features

- Corrosion proof cast aluminum alloy
- Optional side entry and bottom entry
- Optional one or two side entries for the cable
- M10 stainless steel bolts and lock washers
- Earth point provided

Outline drawing (mm)

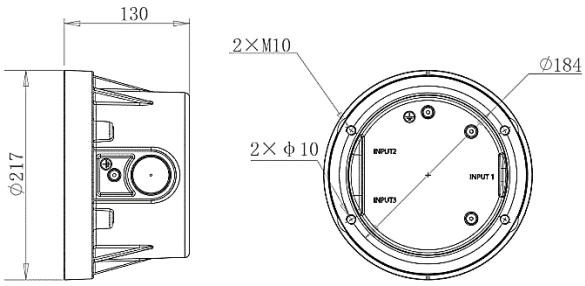


Ordering information




B2-8S-B

Bottom entry, φ100 mm hole or as requirement.



B2-8S-S1

One side entry, equipped with a cable gland.

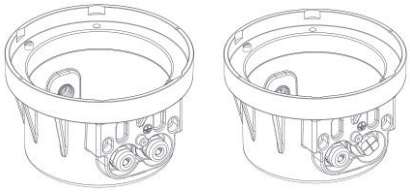

B2-8S-S2

Two side entries, equipped with two cable glands and a thread plug.


The base can be changed to two-side entry by exchanging a cable gland with the thread plug.

Mechanical

- Static Load: > 25 t
- Net weight: 2 kg
- Gross Weight: 2.5kg


8″ Shallow base Accessories

8″ Cover Plate

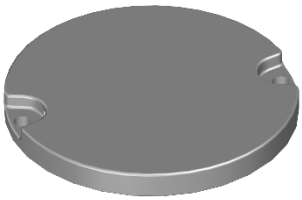


Manufacturing Method: Machine made
Material: Corrosion proof aluminum alloy
Finish: Anodic oxidation

DIMENSIONS (mm)

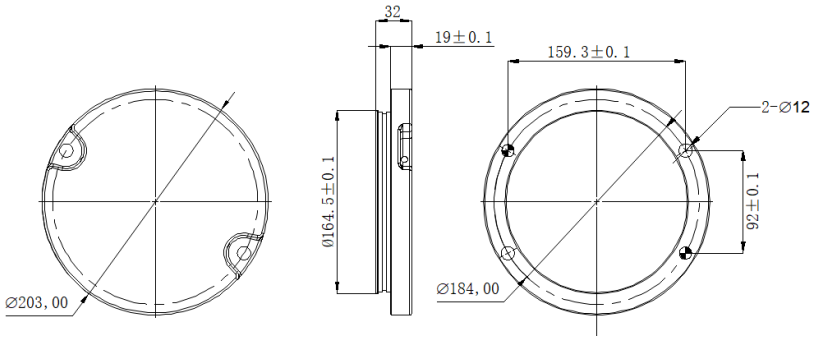

8″Elevated Light Cover

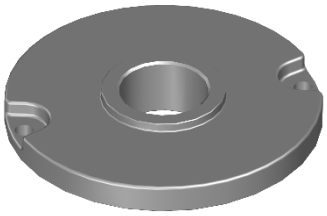

Manufacturing Method: Machine made
Material: Corrosion proof aluminum alloy
Finish: Anodic oxidation or yellow UV resistant coating
Thread: 2 inches female thread

DIMENSIONS (mm)

